




SHRINK FIT CHUCKS HSK 63 DIN 69893 TIPO A

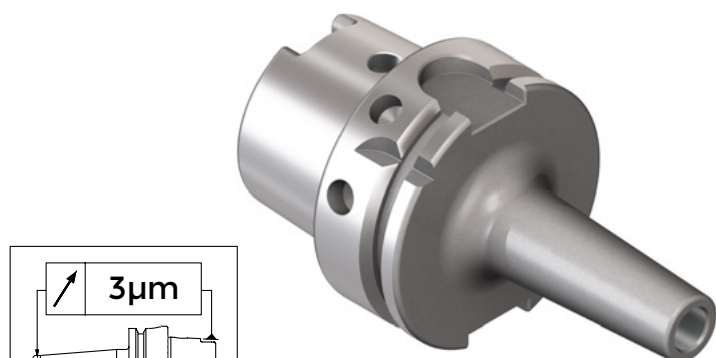

H= 0 > 100 mm - 3 µm
H= 100 > 200 mm - 5 µm

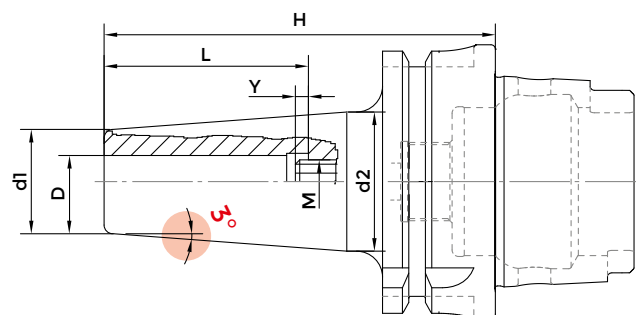

DIN 69893A

3° PROGRAM

COD.	DESCRIPTION	HSK	D	H	L	Y max	d1	d2	G2,5 25000
251-31711	HSK63AH80K03-HTT	63	3	80	28	-	9	14	•
251-31712	HSK63AH80K04-HTT	63	4	80	28	-	10	15	•
251-31714	HSK63AH80K06-HTT	63	6	80	36	10	12	17	•
251-31715	HSK63AH80K08-HTT	63	8	80	36	10	14	19	•
251-31716	HSK63AH85K10-HTT	63	10	85	42	10	16	21	•
251-31717	HSK63AH90K12-HTT	63	12	90	47	10	18	24	•
251-31719	HSK63AH95K16-HTT	63	16	95	47	10	24	30	•
251-31721	HSK63AH100K20-HTT	63	20	100	52	10	26	32	•
251-31722	HSK63AH120K03-HTT	63	3	120	28	-	9	18	•
251-31723	HSK63AH120K04-HTT	63	4	120	28	-	10	19	•
251-31725	HSK63AH120K06-HTT	63	6	120	36	10	12	21	•
251-31726	HSK63AH120K08-HTT	63	8	120	36	10	14	23	•
251-31727	HSK63AH120K10-HTT	63	10	120	42	10	16	25	•
251-31728	HSK63AH120K12-HTT	63	12	120	47	10	18	27	•
251-31730	HSK63AH120K16-HTT	63	16	120	47	10	24	33	•
251-31732	HSK63AH120K20-HTT	63	20	120	52	10	26	35	•
251-31733	HSK63AH160K03-HTT	63	3	160	28	-	9	22	•
251-31734	HSK63AH160K04-HTT	63	4	160	28	-	10	23	•
251-31736	HSK63AH160K06-HTT	63	6	160	36	10	12	25	•
251-31737	HSK63AH160K08-HTT	63	8	160	36	10	14	27	•
251-31738	HSK63AH160K10-HTT	63	10	160	42	10	16	29	•
251-31739	HSK63AH160K12-HTT	63	12	160	47	10	18	31	•
251-31741	HSK63AH160K16-HTT	63	16	160	47	10	24	37	•
251-31742	HSK63AH160K18-HTT	63	18	160	50	10	24	36	•
251-31743	HSK63AH160K20-HTT	63	20	160	52	10	26	38	•