


RADIAL DRILLING AND MILLING HEAD

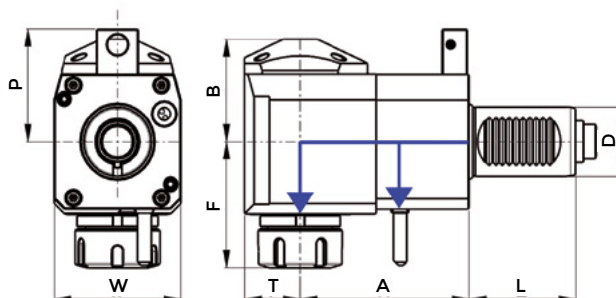

DIN5480 SAUTER

COD.	D	ER	INTERNAL COOLING	DIRECTION	A	B	F	L	P	T	W	MAX TORQUE (Nm)	MAX SPEED (Rpm)	RATIO	P Bar
116-43003	30	ER25	NO	DX	55	48	63	55	56	29	64	28	6000	1:1	-
116-43004	30	ER25	YES	DX	55	51	63	55	56	29	64	28	6000	1:1	20
116-43004L	30	ER25	YES	SX	55	51	63	55	56	29	64	28	6000	1:1	20
116-44005	40	ER25	NO	DX	80	59	70	63	65	36	75	50	6000	1:1	-
116-44006	40	ER25	YES	DX	80	62	70	63	65	36	75	50	6000	1:1	20
116-44006-80BAR	40	ER25	YES	DX	80	62	70	63	65	36	75	50	6000	1:1	80
116-43005	30	ER25	NO	DX	85	48	63	55	56	29	64	28	6000	1:1	-
116-43006	30	ER25	YES	DX	85	51	63	55	56	29	64	28	6000	1:1	20
116-54069	30	ER25	YES	DX/SX	85	51	65	55	56	29	64	28	6000	1:1	20
116-46001	30	ER25	NO	DX	100	48	63	55	56	29	64	28	6000	1:1	-
116-46002	30	ER25	YES	DX	100	51	63	55	56	29	64	28	6000	1:1	20
116-54097	40	ER25	NO	SX	100	59	72	63	65	36	75	50	6000	1:1	-
116-44007	40	ER25	NO	DX	100	59	70	63	65	36	75	50	6000	1:1	-
116-44008	40	ER25	YES	DX	100	62	70	63	65	36	75	50	6000	1:1	20
116-44009	40	ER32	NO	DX	80	59	74	63	65	36	75	50	6000	1:1	-
116-54098	40	ER32	YES	DX/SX	80	62	75	63	65	36	75	50	6000	1:1	20
116-44010	40	ER32	YES	DX	80	62	74	63	65	36	75	50	6000	1:1	20
116-44011	40	ER32	NO	DX	100	59	74	63	65	36	75	50	6000	1:1	-
116-44012	40	ER32	YES	DX	100	62	74	63	65	36	75	50	6000	1:1	20
116-44012L	40	ER32	YES	SX	100	62	74	63	65	36	75	50	6000	1:1	20
116-54099	40	ER32	YES	DX	100	72	75	63	65	36	75	50	6000	1:1	80
116-45053	50	ER32	NO	SX	110	64	117,1	78	73	42	88	80	6000	1:1	-
116-45054	50	ER32	YES	DX	110	64	117,1	78	73	42	88	80	6000	1:1	20
116-45030	50	ER40	YES	DX	110	64	119,1	78	73	42	88	80	6000	1:1	20

* left version on enquiry

ON REQUEST AVAILABLE INTERNAL COOLANT 80 BAR