


RADIAL DRILLING AND MILLING HEAD

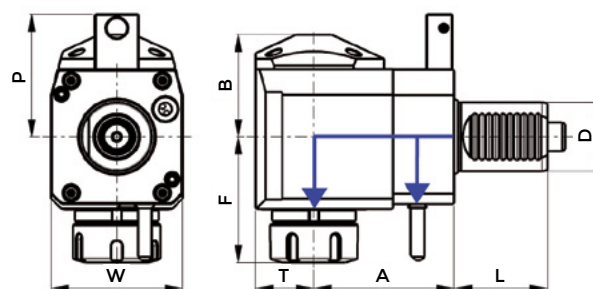


DIN5482 SAUTER

COD.	D	ER	INTERNAL COOLING	DIRECTION	A	B	F	L	P	T	W	MAX TORQUE (Nm)	MAX SPEED (Rpm)	RATIO	P Bar
116-43013	30	ER25	YES	DX	55	51	63	45	48	26	64	28	6000	1:1	20
116-44024	40	ER32	NO	DX	80	59	74	53	71	33	75	50	6000	1:1	-
116-44025	40	ER32	YES	DX	80	62	74	53	71	33	75	50	6000	1:1	20
116-45044	50	ER32	NO	DX	110	64	117,1	71	83	42	88	80	6000	1:1	-

* left version on enquiry

ON REQUEST AVAILABLE INTERNAL COOLANT 80 BAR

OFFSET RADIAL DRILLING AND MILLING HEAD

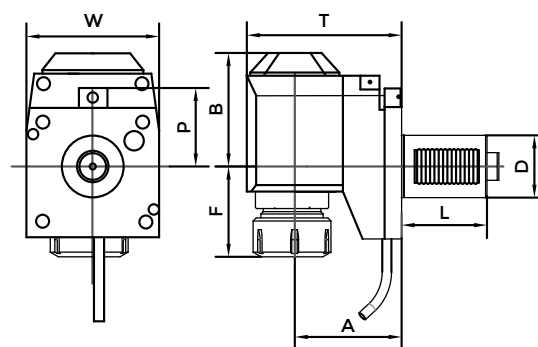

DIN5482 SAUTER

COD.	D	ER	INTERNAL COOLING	DIRECTION	A	B	F	L	P	T	W	MAX TORQUE (Nm)	MAX SPEED (Rpm)	RATIO	P Bar
116-54076	30	ER25	NO	SX	75	71	42	45	48	104	64	28	6000	1:1	-

* left version on enquiry

ON REQUEST AVAILABLE INTERNAL COOLANT 80 BAR