
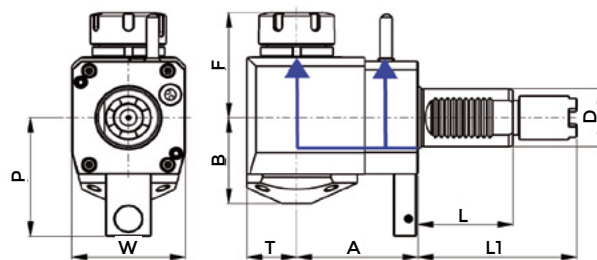


RADIAL DRILLING AND MILLING HEAD

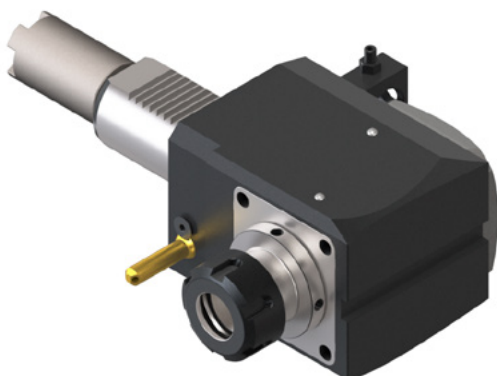


STEPPED - HAAS

COD.	D	ER	INTERNAL COOLING	DIRECTION	A	B	F	L	L1	P	T	W	MAX TORQUE (Nm)	MAX SPEED (Rpm)	RATIO	P Bar
116-44073	40	ER25	YES	SX	80	62	70	63	117,55	82	36	75	50	6000	1:1	20
116-54105	40	ER32	YES	SX	80	59	91	63	130,25	82	36	75	50	6000	1:1	20
116-47003	40	ER32	NO	SX	69	59	74	63	104,85	82	36	75	50	6000	1:1	-
116-54101	40	ER32	NO	SX	69	56	91	63	117,55	82	36	75	50	6000	1:1	-
116-47004	40	ER32	YES	SX	69	62	74	63	104,85	82	36	75	50	6000	1:1	20
116-47007	40	ER32	NO	SX	69	59	74	63	117,55	82	36	75	50	6000	1:1	-
116-47008	40	ER32	YES	SX	69	62	74	63	117,55	82	36	75	50	6000	1:1	20
116-44074	40	ER32	NO	SX	80	59	74	63	117,55	82	36	75	50	6000	1:1	-
116-44075	40	ER32	YES	SX	80	62	74	63	117,55	82	36	75	50	6000	1:1	20
116-44078	40	ER32	NO	SX	80	59	74	63	130,25	82	36	75	50	6000	1:1	-

ON REQUEST AVAILABLE INTERNAL COOLANT 80 BAR

OFFSET RADIAL DRILLING AND MILLING HEAD

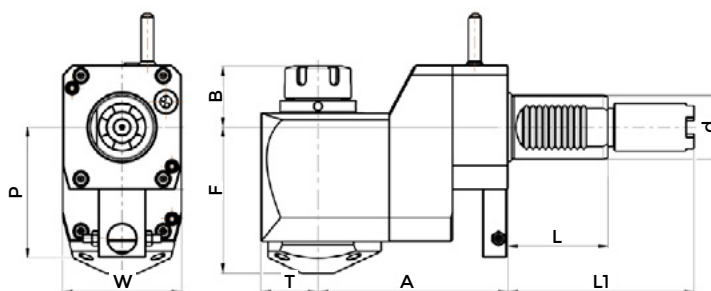

STEPPED - HAAS

COD.	D	ER	INTERNAL COOLING	DIRECTION	A	B	F	L	L1	P	T	W	MAX TORQUE (Nm)	MAX SPEED (Rpm)	RATIO	P Bar
116-54110	40	ER32	NO	SX	120	92	42	63	117,55	82	36	75	50	6000	1:1	-
116-54113	40	ER32	YES	SX	120	95	42	63	117,55	82	36	75	50	6000	1:1	20