


HIGH PRECISION ER COLLETS

ER-HP collets are different from ER standard collets on p. pagina 615 because of the high precision: < 0,005 runout accuracy

≤ 0,005

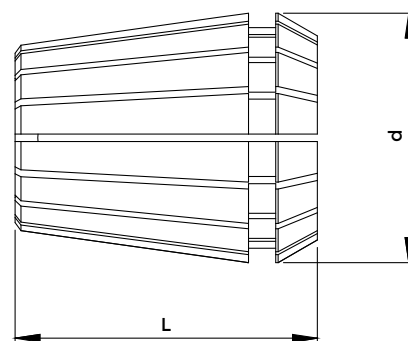

DIN 6499/B

COD.	DESCRIPTION	RANGE	d	L
0554 HP	ER 8 HP	1 ÷ 5	8,5	13,5
5573 HP	ER 11 HP	1 ÷ 7 - OVERSIZE 7,5 ÷ 8	11,5	18,0 - OVERSIZE → 15,0
0364 HP	ER 16 HP	1 ÷ 10 - OVERSIZE 10,5 ÷ 12	17	27,5 - OVERSIZE → 21,5
0787 HP	ER 20 HP	1 ÷ 13 - OVERSIZE 14 ÷ 15	21	31,5 - OVERSIZE → 26,5
0996 HP	ER 25 HP	1 ÷ 16 - OVERSIZE 17 ÷ 20	26	34,0 - OVERSIZE → 28,0
0988 HP	ER 32 HP	2 ÷ 20 - OVERSIZE 21 ÷ 25	33	40,0 - OVERSIZE → 34,0
0821 HP	ER 40 HP	3 ÷ 30 - OVERSIZE 31 ÷ 32	41	46,0 - OVERSIZE → 39,5
4055 HP	ER 50 HP	6 ÷ 34 - OVERSIZE 35 ÷ 36	52	60,0 - OVERSIZE 60,0

REDUCED SET OF COLLETS ER-HP TYPE

COMPLETE SET OF COLLETS ER-HP TYPE



IN PLASTIC TRAY

COD.	DESCRIPTION	DIAMETERS	N° OF COLLETS
7558	ER 8 HP Reduced	Ø1-2-3-4-5	5
7559	ER 11 HP Reduced	Ø1-2-3-4-5-6-7	7
7560	ER 16 HP Reduced	Ø2-4-6-8-10	5
7561	ER 20 HP Reduced	Ø2-4-6-8-10-12	6
7562	ER 25 HP Reduced	Ø4-6-8-10-12-16	6
7563	ER 32 HP Reduced	Ø4-6-8-10-12-16-20	7
7564	ER 40 HP Reduced	Ø4-6-8-10-12-16-20-25	8
7572	ER 8 HP Reduced	Ø1-2-3-4-5	5
7573	ER 11 HP Reduced	Ø1-2-3-4-5-6-7	7
7574	ER 16 HP Reduced	Ø2-4-6-8-10	5
7575	ER 20 HP Reduced	Ø2-4-6-8-10-12	6
7576	ER 25 HP Reduced	Ø4-6-8-10-12-16	6
7577	ER 32 HP Reduced	Ø4-6-8-10-12-16-20	7
7578	ER 40 HP Reduced	Ø4-6-8-10-12-16-20-25	8

IN WOODEN CASE



IN PLASTIC TRAY

COD.	DESCRIPTION	DIAMETERS	N° OF COLLETS
7565	ER 8 HP Complete	from Ø1 to Ø5	9
7566	ER 11 HP Complete	from Ø1 to Ø7	13
7567	ER 16 HP Complete	from Ø1 to Ø10	10
7568	ER 20 HP Complete	from Ø2 to Ø13	12
7569	ER 25 HP Complete	from Ø2 to Ø16	15
7570	ER 32 HP Complete	from Ø3 to Ø20	18
7571	ER 40 HP Complete	from Ø4 to Ø26	23
7579	ER 8 HP Complete	from Ø1 to Ø5	9
7580	ER 11 HP Complete	from Ø1 to Ø7	13
7581	ER 16 HP Complete	from Ø1 to Ø10	10
7582	ER 20 HP Complete	from Ø2 to Ø13	12
7583	ER 25 HP Complete	from Ø2 to Ø16	15
7584	ER 32 HP Complete	from Ø3 to Ø20	18
7585	ER 40 HP Complete	from Ø4 to Ø26	23

IN WOODEN CASE