


SEALED COLLETS FOR HYDRAULIC CHUCKS

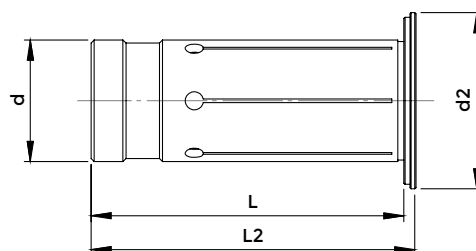

OVERSIZE diameters, for the construction characteristics, do not allow the use at high pressures. Working pressure: up to 70 Bar / 1020 PSI

PH

COD.	DESCRIPTION	RANGE	STEP	d	d2	L	L2
0520	PH 12	2,5 ÷ 8 OVERSIZE 9 ÷ 10	1	12	16,5	45	47
0521	PH 20	3 ÷ 16 OVERSIZE 17 ÷ 18	1	20	24	50,5	52,5
0676	PH 25	6 ÷ 20 OVERSIZE 21 ÷ 22	1	25	29	54,5	56,5
0522	PH 32	6 ÷ 25 OVERSIZE 26 ÷ 28	1	32	35,5	60,5	62,5

REDUCED SET OF PH COLLETS



	COD.	DESCRIPTION	DIAMETERS	N° OF COLLETS
IN SINGLE PACKS	7700	PH 20 Reduced	Ø 6 - 8 - 10 - 12 - 16	5
	7701	PH 25 Reduced	Ø 6 - 8 - 10 - 12 - 16 - 20	6
	7702	PH 32 Reduced	Ø 6 - 8 - 10 - 12 - 16 - 20 - 25	7
IN CASE	7703	PH 20 Reduced	Ø 6 - 8 - 10 - 12 - 16	5
	7705	PH 25 Reduced	Ø 6 - 8 - 10 - 12 - 16 - 20	6
	7706	PH 32 Reduced	Ø 6 - 8 - 10 - 12 - 16 - 20 - 25	7